


SCC-931T

1/4" Anti-Vandal, Color, Motorized Zoom Lens
Dome Camera



Dimensions (unit : in)

Front/Rear Panel

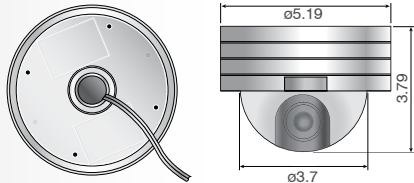

Summary

SCC-931T is an anti-vandal color dome camera that ensures outstanding observation with excellent color sensitivity and high resolution. The combination of superior imaging and anti-vandal housing assembly make the SCC-931T a perfect solution to areas that require additional protection. Remote control and programming is accomplished via RS-485 communication (half duplex), which allows all cameras in the high impact series to be remotely controlled.

Features

- 1/4 Inch IT Super HAD CCD
- 480TV Lines Resolution
- Minimum Scene Illumination: 0.005 Lux @ 15IRE, Sens-Up x128 (F1.6)
- 12X Motorized Optical Zoom with 10X Digital Zoom
- DSP (Digital Signal Processing)
- On Screen Display (OSD)
- Motion Detection
- IP66 Rated
- RS485 Remote Control
- 12VDC/AC24V (60Hz)
- Built-In Ground Fault Isolation Transformer

Recommended Accessories

GV-TRAN-24-20LED, 24VAC, 20VA, Class II plug in transformer

SADT-101WM, Wall Mount for SCC-931T, indoor/outdoor

SSC-2000, System Keyboard w/ touch screen graphic LCD Panel and DVR Control

*See accessories page for more options

12x Optical Zoom

The camera uses a 12x optical (3.6 ~ 43.2mm) motorized zoom lens, along with the 10X digital zoom, resulting in 120X zooming capability.



Vandal and Weather Resistant (IP66)

Built for the toughest conditions, the SCC-931T is suited for external installation, thanks to its special structure that resists water and dust



Weather Resistant



Vandal Resistant

SCC-93IT

1/4" Anti-Vandal, Color, Motorized Zoom Lens
Dome Camera



Specifications

Camera Type	Color	Anti-Vandal Digital Dome Camera	
Image	Device	IT Super HAD CCD	
	Size	1/4"	
	Pixels	Total: 811(H) x 508 (V)	
	Pixels	Effective: 768 (H) x 494 (V)	
Scanning	System	525 lines, 2:1 Interlace	
	Horz. Freq. Internal Mode	15,734Hz	
	Horz. Freq. Line-lock Mode	15,750Hz	
	Vert. Freq. Internal Mode	59.94Hz	
	Vert. Freq. Line-lock Mode	60Hz	
Min. Scene Illumination	Color	0.005 Lux @ 15IRE, Sens-Up x128 (F1.6) 2 Lux @ 50 IRE (F1.8)	
	ELC	1/10,000 sec (max.)	
Electronic Shutter Speed Functions	BLC	ON/OFF (Area Setting)	
	AGC	ON/OFF	
	AWB	ATW/AWC/MANUAL	
	Sync	Internal/Line lock	
	Sense-Up	Off / Auto x2~x28 / FIX x2~x128	
	Motion Detection	Menu	
	Presets	10	
	Digital Zoom	10X	
	Lens	Focal Length	3.6~43.2mm (12x Optical)
		Aperture	F1.8(Wide), F2.6(Tele)
Viewing Angle		Wide: 52° .8'(H) x 40° .3'(V) Tele: 4° .7'(H) x 3° .6'(V)	
Resolution	Horizontal	480 TV Lines	
	Vertical	350 TV Lines	
Video Output	VBS 1.0Vp-p	VBS 1.0Vp-p	
S/N Ratio	S/N Ratio	52dB	
OSD	OSD	YES	
Environmental Conditions	Operating Temperature	-10° ~ 50°C (14° ~ 122°F)	
	Humidity	Less than 90%	
Power	Power Requirement	12VDC/AC24V (60Hz)	
	Power Consumption	6W	
Physical Specification	Dimensions (oxH)	5.2 x 3.75 in / 132 x 95.3mm	
	Weight	2.2 lb / 1 kg	
Certifications	UL, FCC		